ECONOMICLINE

The Economic Line radiators are made from an aluminium alloy which allows rapid transmission of heat, and due to its anti-corosion stability, guarantees an almost unlimited lifetime.



The technological procedure for manufacturing radiators comprises the following phases: die casting, assembly and coating.

The quality is monitored during complete manufacturing process. Quality control begins with the chemical analysis of melting charge and ends with testing of water tightness of both individual columns and complete radiator unit.

The Economic Line radiators are packaged in heat-shrunk protective plastic foil. During the mounting procedure the foil needs to be removed; just break it open at coupling and suspension points. The foil is to be kept in place until end of construction work in order to protect the radiator from dust and possible damage.

Radiator Economic Line is coated with anaforetic basic colour and epoxy-polyester powder. The standard colour is white, RAL 9016, but there is a range of Lipovica colours to chose from.



Due to their high quality, good mechanical properties, durability and exceptional resistance to corrosion, Lipovica radiators come with a 10-year guarantee.


The standard at the Lipovica factory is to manufacture high-quality products.

ECONOMICLINE



| Type of radiator | | 500/80 | 600/80 |
|--|--------|--------|---------|
| Column hight A | mm | 576 | 676 |
| Coupling size B | mm | 500 | 600 |
| Column width C | mm | 80 | 80 |
| Mounting depth D | mm | 80 | 80 |
| Column weight | kg | 1,1 | 1,2 |
| Column water content | 1 | 0,34 | 0,38 |
| Heating area | m2/col | 0,41 | 0,45 |
| Heating effect $90/70/20 \Delta t$ -60 | W/col | 123 | 144 |
| Heating effect 75/65/20 Δt-50 | W/col | 98 | 114 |
| Heating effect $55/45/20 \Delta t$ -30 | W/col | 51 | 59 |
| Radiator coefficient | | 0,6537 | 0,73833 |
| Heating effect exponent | n | 1,2801 | 1,2875 |



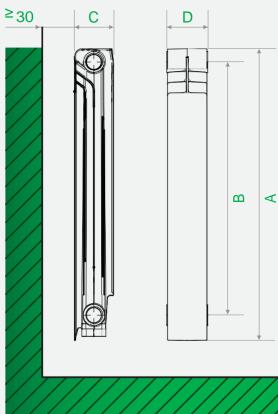

lipovica





LIPOVICA d.o.o. a company for the production of aluminium radiators, pressure casts and gravity casts

Lipovečka 24, 44317 DONJA VLAHINIČKA, POPOVAČA OIB: 62434592704 MB: 1686623

RECEPTION

Telephone: +385 (0) 98 3466 83 E-mail: lipovica@lipovica.hr

SALES

E-mail: prodaja@lipovica.hr Web: www.lipovica.hr